


IPSCRANES TAGLINE WINDERS



**NOW
AVAILABLE
FOR
ORDER!**

SINGLE | DOUBLE | TRIPLE | QUAD BARREL

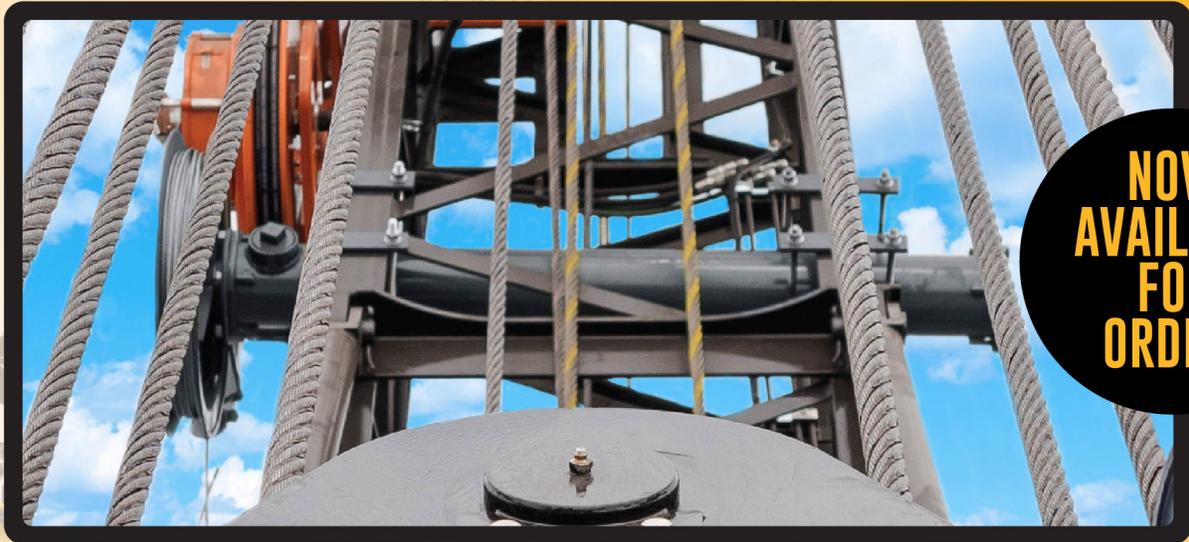

**VARIOUS MODELS FOR
YOUR APPLICATION**



**FOR LATTICE BOOM CRANES:
AMERICAN, LINK-BELT, MANITOWOC,
KOBELCO, OHIO & MORE**



**AIDS IN LOAD
CONTROL & PLACEMENT**

ORDER TODAY

*Manufactured by IPSCranes
Tagline winders and aftermarket parts for existing taglines
are now available to order.*

IPSCRANES

**A LEADER IN RESEARCH, TECHNOLOGY AND INNOVATION
MANUFACTURING | REBUILDS | PARTS | SERVICES**

DRIVING YOUR BUSINESS FORWARD

STABILIZE CRANE LOADS

Taglines provide constant, positive tension on the clamshell bucket to hold it steady while suspended in the air regardless of boom angle. Our tagline is shipped fully assembled when practical, consisting of a drum, wire rope, spring-loaded cylinders, and a wire rope fairlead. Once received, the IPS Cranes tagline is ready to use on all lattice boom cranes.

Tagline models available for American, Manitowoc, Link-Belt, Kobelco, Ohio, and more.

LOAD PLANNING? Our engineers can work with you to determine the model for your application.

TAGLINE WINDERS

Single Barrel IPS Cranes Taglines					
Description	Approx Weight LB (KG)	Barrel Length IN (MM)	Recommended Bucket Size YD ³ (M ³)	Recommended Boom Length FT (M)	Cable Pullout From Neutral FT (M)
IPS Cranes Model 1202 Single Barrel Tagline with 20" (508 MM) Reel	301 (137)	30 (762)	Small Truck Cranes	30 (9)	45 (14)
IPS Cranes Model 1252 Single Barrel Tagline with 20" (508 MM) Reel	326 (148)	38 (965)	3/8 to 5/8 (0.25 to 0.50)	30 (9)	60 (18)
IPS Cranes Model 1302 Single Barrel Tagline with 20" (508 MM) Reel	351 (159)	46 (1168)	3/4 (0.50)	40 to 60 (12 to 18)	70 (21)
IPS Cranes Model 1402 Single Barrel Tagline with 20" (508 MM) Reel	392 (178)	60 (1524)	1 to 1-1/2 (0.75 to 1.25)	80 (24)	90 (27)
IPS Cranes Model 1552 Single Barrel Tagline with 20" (508 MM) Reel	456 (207)	78 (1981)	1 to 1-1/2 (0.75 to 1.25)	Deep Digging	135 (41)
Double Barrel IPS Cranes Taglines					
Description	Approx Weight LB (KG)	Barrel Length IN (MM)	Recommended Bucket Size YD ³ (M ³)	Recommended Boom Length FT (M)	Cable Pullout From Neutral FT (M)
IPS Cranes Model 2402 Double Barrel Tagline with 20" (508 MM) Reel	826 (375)	60 (1524)	1-1/2 to 4 (0.75 to 3)	80 (24)	90 (27)
IPS Cranes Model 2403 Double Barrel Tagline with 30" (762 MM) Reel	876 (397)	60 (1524)	1-1/2 to 2 (1.25 to 1.50)	100 (30)	125 (38)
IPS Cranes Model 2553 Double Barrel Tagline with 30" (762 MM) Reel	966 (438)	78 (1981)	1-1/2 to 2 (1.25 to 1.50)	Deep Digging	200 (61)
IPS Cranes Model 2554 Double Barrel Tagline with 40" (1016 MM) Reel**	986 (447)	78 (1981)	1-1/2 to 2 (1.25 to 1.50)	Deep Digging	250 (76)
**This model is available with heavier coil spring wire for jobs requiring greater tension.					
Bucket size: 2 to 5 YD ³ (1.5 to 3.75 M ³); deep digging. Cable pullout from neutral: 180 FT (55 M)					
Triple Barrel IPS Cranes Taglines					
Description	Approx Weight LB (KG)	Barrel Length IN (MM)	Recommended Bucket Size YD ³ (M ³)	Recommended Boom Length FT (M)	Cable Pullout From Neutral FT (M)
IPS Cranes Model 3402 Triple Barrel Tagline with 20" (508 MM) Reel	1174 (533)	60 (1524)	4 to 8 (3 to 6)	80 (24)	90 (27)
IPS Cranes Model 3403 Triple Barrel Tagline with 30" (762 MM) Reel	1211 (549)	60 (1524)	3 to 5 (2.25 to 3.75)	100 (30)	125 (38)
IPS Cranes Model 3553 Triple Barrel Tagline with 30" (762 MM) Reel	1382 (627)	78 (1981)	3 to 5 (2.25 to 3.75)	For Digging 100 (30) Below Grade	200 (61)
IPS Cranes Model 3554 Triple Barrel Tagline with 40" (1016 MM) Reel***	1432 (650)	78 (1981)	4 to 5 (3 to 3.75)	For Digging 100 (30) Below Grade	259 (79)
***This model is available with heavier coil spring wire for jobs requiring greater tension.					
Bucket size: 5 to 10 YD ³ (3.75 to 7.75 M ³); medium depth digging to 60 FT (18M) below grade. Cable pullout from neutral: 180 FT (55 M)					
Quad Barrel IPS Cranes Taglines					
Description	Approx Weight LB (KG)	Barrel Length IN (MM)	Recommended Bucket Size YD ³ (M ³)	Recommended Boom Length FT (M)	Cable Pullout From Neutral FT (M)
IPS Cranes Model 4403 Quad Barrel Tagline with 30" (762 MM) Reel	1580 (717)	60 (1524)	5 to 8 (3.75 to 6)	100 (30)	125 (38)
IPS Cranes Model 4553 Quad Barrel Tagline with 30" (762 MM) Reel	1745 (792)	78 (1981)	10 to 13 (7.75 to 10)	For Digging 100 (30) Below Grade	200 (61)
IPS Cranes Model 4554 Quad Barrel Tagline with 40" (1016 MM) Reel	1800 (817)	78 (1981)	8 to 11 (6 to 8.5)	For Digging 100 (30) Below Grade	250 (76)
IPS Cranes Model 4555 Triple Barrel Tagline with 50" (1270 MM) Reel	1850 (839)	78 (1981)	10 to 12 (7.75 to 9.25)	For Digging 100 (30) Below Grade	280 (85)



WOMEN OWNED

IPS CRANES

651.777.0105

sales@ipscranes.com

www.ipscranes.com

DESIGN  BUILD  SUPPORT